


R1234yf – Opteon[®] YF.

Automotive refrigerant with
low global warming potential.



R1234yf. Low-GWP refrigerant for mobile air conditioning.

Global warming potential

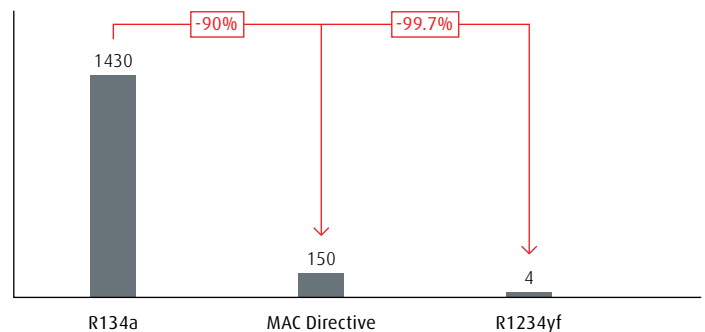

The environmental challenge

For over twenty years, R134a has been an extremely useful refrigerant gas in a number of applications. In fact, it is the most common refrigerant gas in mobile air conditioning (MAC) systems. R134a has a global warming potential (GWP) of 1430, creating direct greenhouse gas emissions that contribute to the total CO₂ equivalent emissions (i.e. carbon footprint) of MAC systems over their lifetime.

A growing focus on the environmental impact of refrigerants is fuelling demand for sustainable refrigeration solutions that can provide satisfactory cooling performance with a lower global warming impact.

The EU MAC directive (2006/40) was put in place in 2006. It limits the GWP of MAC refrigerant gases used in new car platforms to 150 from January 2011. From 2017 onwards, this standard will apply to all new cars.

The next generation low-GWP solution

Developed jointly by Honeywell and DuPont™, Opteon® YF (R1234yf) is a next-generation HFO refrigerant that combines environmental benefits with excellent cooling performance. The majority of the automotive OEMs have already launched new car models using R1234yf and is therefore the low-GWP refrigerant of choice.

HFO R1234yf has a GWP of just 4, providing substantially lower direct greenhouse gas emissions than R134a systems. It thus significantly reduces the carbon footprint of refrigeration systems over the total lifetime. This lower-GWP alternative has been comprehensively tested and shown to be a reliable, cost-efficient solution.

	R134a	Opteon® YF (R1234yf)
Chemical name	1,1,1,2-tetrafluoroethane	2,3,3,3-tetrafluoropropene
Chemical formula	CH ₂ FCF ₃	CF ₃ CF = CH ₂
Product group	Hydrofluorocarbon (HFC)	Hydrofluoroolefin (HFO)
Preferred oil	Poly Alkylene Glycol (PAG) (Polyolester (POE))	Poly Alkylene Glycol (PAG) formulated for R1234yf (Polyolester (POE))
ASHRAE safety classification	A1 – non-toxic & non-flammable	A2L – non-toxic & mildly-flammable
Boiling Point @ 1atm	-26°C	-29°C
Critical Temperature	102°C	95°C
Critical Pressure	41 bar(a)	34 bar(a)
ODP	0	0
GWP	1430	4
GWP as % of R134a	100%	0.3%



Photo used with the kind permission of E.I. du Pont de Nemours

Benefits at a glance

Impressive performance

- Designed for use in mobile air conditioning systems
- Similar cooling capacity & energy efficiency to R134a
- Suited to all climates across the world
- Lower environmental impact
- Meets the world's toughest environmental standards
- GWP of just 4 – 99.7% lower than R134a
- Zero ozone depletion potential
- Non-toxic

Additional information

- R1234yf is flammable and may require additional safety measures during implementation, use and service. We recommend that you carry out a risk assessment prior to purchasing.

R1234yf should only be used in mobile air conditioning systems designed to operate with this gas. It should not be used to retrofit existing R134a systems.

R1234yf is a more complex and costly refrigerant gas to produce than R134a. We are happy to work with you to effectively manage your stocks.

Trusted partner

The Gases Division of The Linde Group is one of the largest and most global distributors of refrigerants. For more than 40 years, we have been a trusted partner of refrigeration and air conditioning companies around the world. We operate throughout Europe, Africa, Asia-Pacific and the Americas.

Our broad product range spans both traditional fluorocarbon and natural refrigerants in a wide range of packages. R1234yf is commonly available in cylinders. Other packages may be available upon request. Our high-quality operations and vast distribution networks ensure the quality and availability of our products. We also offer a range of complementary services, including technical support, legislative compliance assistance and environmental audits.

If you have any questions please contact us at 0800 02 0800 or www.BOOnline.co.uk/refrigerants.

BOC – turning ideas into solutions

BOC is a member of The Linde Group, the leading global gases and engineering company. BOC is the UK's largest provider of industrial, specialist and medical gases, as well as related products and services. As a leader in the application of technology, we are constantly looking for new ways to provide our customers with high quality products and innovative solutions.

At BOC we help our customers to create added value, clearly discernible competitive advantage and hence greater profitability. To achieve this we have a comprehensive range of products and services, and technical support which can be customised to meet the individual requirements of our clients.

To keep ahead of the competition in today's market, you need a partner for whom quality, service, process and productivity optimisation are an integral part of customer support. We are there for you and with you, helping to build your success.

BOC's reputation has been forged through partnerships – with customers, with relevant regulatory authorities and with key suppliers. In this way, we deliver comprehensive and consistent benefits to you.

Distribution partner for

DuPont™ Opteon® YF

**AUTOMOTIVE REFRIGERANT
HFO-1234yf**

BOC

The Priestley Centre, 10 Priestley Road, The Surrey Research Park, Guildford, Surrey GU2 7XY, United Kingdom
Tel +44 800 02 0800, Fax +44 800 136 601, www.BOOnline.co.uk/refrigerants

DuPont™ and Opteon® are trademarks or registered trademarks of E. I. du Pont de Nemours and Company or its affiliates used under licence by Linde.
Disclaimer: This information is provided for guidance only. We make no warranties expressed or implied and assume no liability in connection with any use of this information. For further support please contact your local Linde supplier.